

Part of the RightPath
line of ADA products




RAPIDRAMP
THE EXPRESS ADA RAMP

"When used, temporary ramps shall provide a 12:1 (8.33%) or flatter slope, with a slip-resistant surface."

- MUTCD 11th Edition

RAPIDRAMP™ DIMENSIONS

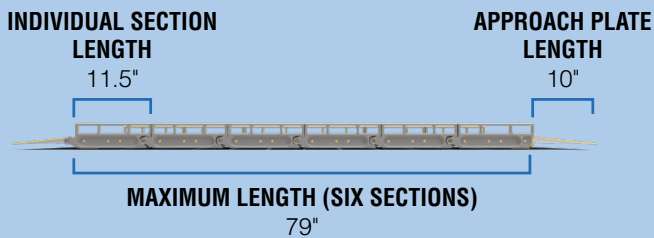

RAPIDRAMP FEATURES

- » Slip-resistant surface
- » Rated to support a load of 1,000 lbs.
- » Ramp mid-sections weigh approximately 22 lbs.
- » End-sections (with the approach plate) weighs 55 lbs.
- » Sections are 48" wide*
- » Maximum length is 79" (six sections)

Patents: <http://bit.ly/3cHVTp8>



INTRODUCING RAPIDRAMP

RapidRamp is designed for up to a 6" curb, RapidRamp can be placed in a location quickly and easily.

The RapidRamp is a portable, ADA-Compliant ramp engineered with a lightweight design that minimizes installation and removal. **Consisting of six sections that easily interlock, with no hardware required,** RapidRamp stores conveniently in truck beds and most vans.

RapidRamp delivers an immediate solution for ramp needs, including accessibility around short-duration job sites and transportation of heavy loads with a cart or dolly.

The RapidRamp is designed to deliver a firm, stable, and slip-resistant pathway over curb transitions.

RapidRamp is rated to a 1,000 lb. capacity, greatly increasing its practical applications. For shorter curbs, RapidRamp can be installed with fewer than six sections.

